

T-BAR ECO | Order Specification Guide

T-BAR ECO™


Product Name	Type of LED/K Color	Size	Grid Type	Optic	Mounting Clips
<b>TBECOH</b> = T-BAR ECO High Output 120-277V <b>TBECOL</b> = T-BAR ECO Low Output 120-277V	<b>HW</b> = Warm White 3000K <b>MW</b> = Medium Warm 3500K <b>MN</b> = Medium Neutral 4000K	<b>2</b> = 2 ft <b>4</b> = 4 ft <b>4L</b> = 4 ft L <b>6</b> = 60 cm <b>12</b> = 120 cm <b>12L</b> = 120 cm L	<b>24</b> = 15/16"	<b>DW</b> = Diffuser White	<b>U</b> = Universal <b>A</b> = Armstrong

Patent No. 8,177,385; 9,879,850. Additional patents are pending.

CRI = >82


Type	Lumens*	Watts	lm/W*	lm/ft*
TBECOL-2	949	6.4	147	474
TBECOL-4	1898	12.5	152	474
TBECOH-2	1328	9.4	140	664
TBECOH-4	2669	17.9	149	667

**\*4000K**




15/16" T-BAR ECO

Profile Dimensions

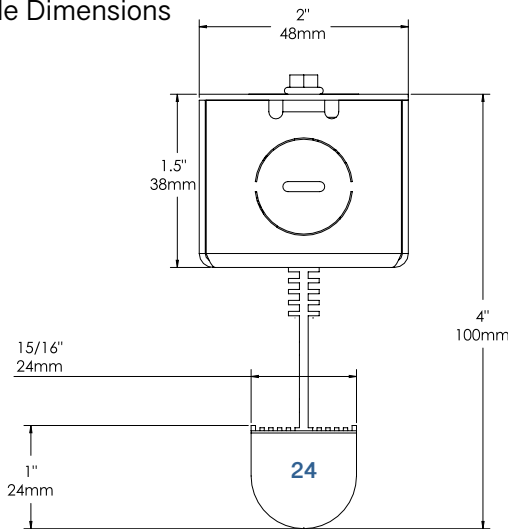

Length Dimensions

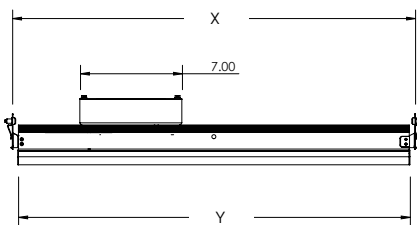

Size	Grid Type	X	Y
2 = 2ft	24 = 15/16"	24"	23"
4 = 4ft	24 = 15/16"	48"	47"
4L = 4ft L	24 = 15/16"	48"	24"

**NOTES:**

T-BAR ECO is a high efficiency LED fixture with integral driver, accepting universal voltage input and 0-10V dimming, offering uniform and diffuse light. Mounted junction box includes driver and compartment for AC input direct wiring and dimming connection. Fixture must be installed in accordance with local electrical codes.

**APPLICATIONS:**

Executive, Medical, Health, Educational, Retail, Hotels, Airport, Hospitality and any open space areas that require a unique and elegant architectural lighting design.

**MOUNTING:**

Universal mounting brackets for easy installation to standard 15/16" T-Bars of most manufacturers' ceiling suspension systems. Armstrong compatible mounting clips for installation with Armstrong Ceiling 15/16" Prelude® and Clean Room™ suspension systems.

**MATERIALS:**

Anodized aluminum extruded body, steel mounting clips, white PC end caps, high transmitting acrylic PMMA lens.

**ELECTRIC:**

Universal input voltage of 120V - 277VAC. Junction box installed on fixture with integral driver and wire nuts inside for connection to line voltage and dimming system.

90% LED lumen maintenance at 60,000hrs (L<sub>90</sub>/60,000)

**WARRANTY:**

5 years limited warranty. For complete warranty terms, please visit our website.

**LISTINGS:**

ETL/cETLus CE RoHS Indoor use only.

